

 **WORCESTER**

Bosch Group



15/24SBI SYSTEM BOILER



*Worcester Bosch supports the
Benchmark code of practice*

G. C. NUMBERS

APPLIANCE

15SBI

24SBI

NATURAL GAS

41 311 43

41 311 44

L. P. G.

41 311 45

41 311 46

USER INSTRUCTIONS & CUSTOMER CARE GUIDE

IMPORTANT: THIS APPLIANCE IS FOR USE WITH NATURAL GAS OR LPG.
THESE INSTRUCTIONS APPLY IN THE UK ONLY.
THESE INSTRUCTIONS ARE TO BE LEFT WITH THE USER OR AT THE GAS METER

EXCELLENCE COMES AS STANDARD

Thank you for purchasing a Worcester gas-fired system boiler.

Worcester system boilers are made by Worcester Heat Systems and the strictest quality control standards are demanded throughout every stage of production.

Indeed, Worcester Heat Systems have led the field in innovative appliance design and performance for more than 30 years.



The result is that your new Worcester system boiler appliance offers you the very best of everything - quality, efficiency, economical running costs, proven reliability and value for money.

What's more, you also have the assurance of our no-nonsense 1 year parts and labour guarantee.

And it's backed up by Worcester Care Call - a complete maintenance scheme to keep your boiler operating at peak condition and efficiency.

No wonder that more and more people are agreeing that when it is gas, it has to be a Worcester system boiler.

CONTENTS

	Page No.
Operating Instructions	3-11
Fault and Breakdowns	12
Maintenance and Extended Warranty Information	13-14
Guarantee Details ...	15-16





GENERAL INFORMATION

GAS SAFETY (INSTALLATION AND USE) REGULATIONS 1998

It is the law that all gas appliances must be installed by a competent person in accordance with the above regulations. Failure to install appliances correctly could lead to prosecution. It is in your interest and that of safety to ensure compliance with the law. The manufacturers notes must not be taken, in any way, as over-riding statutory obligations.

WARNING: This appliance must be earthed and protected by a 3 amp fuse.

ELECTRICITY SUPPLY: 230V ~ 50Hz

IMPORTANT: To get the best from your Worcester system boiler please read these instructions carefully.

In the event of a fault the appliance should not be used until the fault has been corrected by a competent person.

GENERAL DESCRIPTION

(See Fig.1.)

The WORCESTER system boilers are sealed system central heating appliances. They consist of a gas fired boiler having a varying output of between 6 - 15kW (15SBi) and 15 - 24kW (24SBi), a circulating pump and all necessary controls to provide central heating.

They can be connected to a domestic hot water supply system through an optional, internally fitted diverter valve or to an external S or Y plan system.

Central Heating

When a demand is made for heating by the system controls (i.e. a programmer or room thermostat). The pump will energise circulating primary water around the heating system and the burner will light. The heat output from the appliance in this mode has been factory set to mid-range or as reset by your installer. The appliance will operate as necessary to maintain the temperature of the radiators at the level set by the adjustment of the Heating Temperature Control Knob. (See Fig. 2.)


If the system no longer requires output to maintain the desired room temperature, the burner will extinguish. The pump will continue to run for a short period to dissipate the residual heat from the appliance and then switch off.

The appliance will supply heat to the central heating system as required.

Hot Water

A hot water cylinder will be maintained full of hot water under the control of a cylinder thermostat.

Fig. 1. System Diagram.

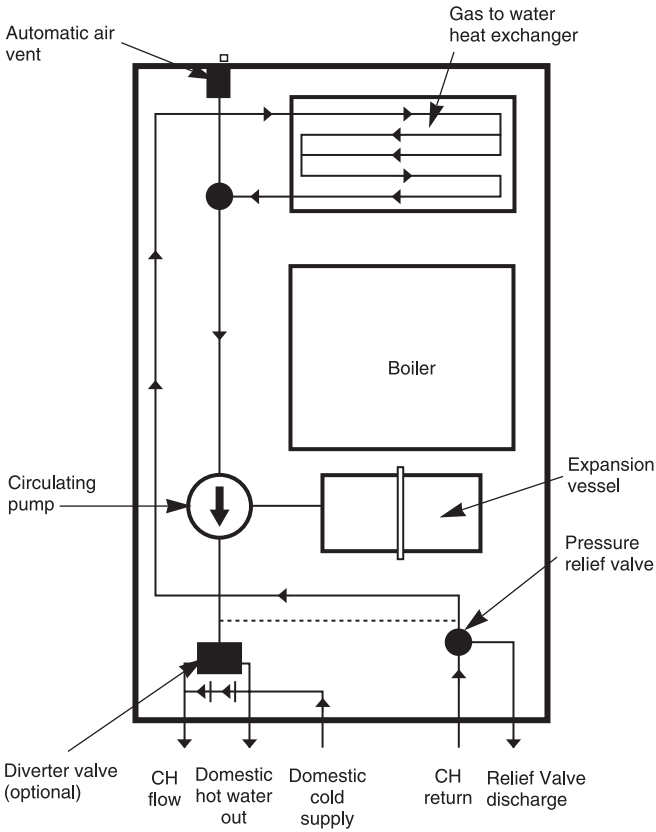



GENERAL NOTES




CENTRAL HEATING SYSTEM

During the first few hours of operation of the central heating system, check that all radiators are being heated at an even rate. Should the upper area of a radiator be at a lower temperature than the base of the radiator, it should be vented by releasing air through the venting screw at the top of each radiator. Make sure your installer shows you how to carry out the operation. Repeated venting will reduce the quantity of water in the system and this must be replenished for safe and satisfactory operation of the appliance. Should water leaks be found in the system or excessive venting be required from any radiator, a service engineer should be contacted and the system corrected.

SEALED HEATING SYSTEM

The appliance must be fitted to a sealed heating system which is pre-pressurised. In this case your installer will advise you on the minimum and maximum pressure that should be indicated on the pressure gauge. See Fig. 3. Check regularly that this pressure is maintained and contact your installer or maintenance engineer if there is a permanent significant drop in pressure indicated on the gauge. If the system loses pressure it should be re-pressurised as instructed by the installer (**N.B. Maximum operating pressure 2.5 bar**).

Fig. 2.



Pressurising The System (See Fig. 2).

(If in doubt leave this procedure to your installer).

Remove the bottom panel to gain access to the filling loop assembly.

Insert the bayonet end of the filling key into the corresponding cut outs in the filling loop housing and twist to lock the key in place.

Turn the grey knob anti-clockwise to allow water ingress and fill until the required pressure is reached.

Turn the grey knob clockwise to stop filling and remove the filling key by lining up the bayonet end of the key with the cut outs in the filling loop housing and withdrawing the key.

N.B. The key must always be removed from the filling loop housing after the system has been filled to prevent accidental filling and to comply with Byelaw 14 of the Water Byelaws Scheme.

Store the key in a safe place for future use and refit the bottom panel

CLEARANCES

Your installer will have provided adequate space around the appliance for safety and servicing. Do not restrict this space by the addition of cupboards, shelves etc. close to the appliance.

	15SBi	24SBi
Left-hand side	10	10
Right-hand side	10	10
In Front	600	600
Above	180	180
Below	200	200

Minimum clearances in millimetres.

ROOM THERMOSTAT

A room thermostat may be fitted for control of the central heating temperature. It will be located in one room of the home. The method of setting a room thermostat varies with the type and manufacture. Refer to the instructions supplied with the room thermostat.

THERMOSTATIC RADIATOR VALVES

If thermostatic radiator valves are to be fitted to the system then they must conform to the requirements of BS2767:1972. It is advisable to leave one valve permanently set at maximum to prevent the boiler short cycling.

VENTILATION OF ROOM SEALED FANNED FLUE (RSF) APPLIANCES

These are room sealed appliances and any ventilation openings in a wall or door must not be obstructed. Do not allow the flue terminal fitted on the outside wall to become obstructed or damaged.

NOTE: Do not place anything on top of the appliance. If the appliance is fitted in a compartment do not use the compartment for storage purposes unless it conforms to the requirements of BS 6798:1987: Section 6. It is essential that the airing space is separated from the boiler space by a perforated non-combustible partition as described in BS 6798:1987.

CIRCULATING PUMP

This may be fitted with a speed adjuster. If so it will be factory set at maximum and should be adjusted by the installer to suit the heating load.

FROST PRECAUTIONS

If the appliance is not to be used for a long period of time and there is a likelihood of freezing, then the appliance should be drained. The Worcester Heat Systems Technical Helpline will advise you on suitable frost precautions.

SERVICE

Annual servicing is important in order to ensure continuing high efficiency and long life for your appliance. In the event of any difficulty in making suitable servicing arrangements, Worcester Heat Systems Limited or other competent persons will discuss regular servicing arrangements and offer a comprehensive maintenance contract.

WARNING

If a gas leak exists, or is suspected, turn off the gas supply to the appliance at the service cock and consult your local service engineer.

Do not touch any electrical switches to turn them either on or off. Open all windows and doors. Do not smoke. Extinguish all naked lights.

CLEANING

Do not use abrasive cleaners on the outer casing. Use a damp cloth and a little detergent.



OPERATION OF CONTROLS

(See also label on inside of appliance front panel).

The appliance is fitted with the following controls:

CENTRAL HEATING TEMPERATURE CONTROL

The position of this knob will determine the temperature of the water delivered to the radiators between the '1' and 'MAX' position. When the knob is turned anti-clockwise past the '1' position to the 'OFF' (Summer Position) the appliance is off.


FACIA MOUNTED PROGRAMMER (if fitted)

Your installer may have mounted a mechanical programmer into the fascia of your appliance. Operating instructions are supplied with the programmer.

RESET BUTTON

Press and release this button if the appliance fails to operate - if the appliance still fails to operate then contact Worcester Heat Systems or your installer.

Fig. 3. Controls.

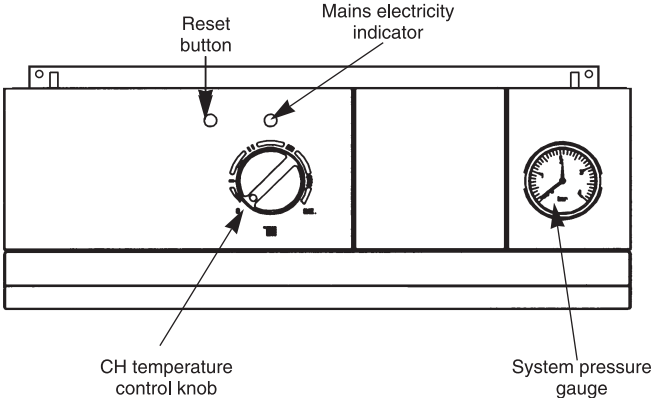

TO LIGHT AND STOP THE APPLIANCE

INDICATOR LIGHTS

Green light:

MAINS : 'ON'

TO LIGHT THE APPLIANCE

Check that the water valves to the central heating circuit are open.
Check that the grey needle on the pressure gauge is not below the required pressure.

Switch on the mains electricity. Set the room thermostat, if fitted, to maximum. Turn the central heating temperature control knob to '**MAX**'. The burner will light. Set the central heating and hot water temperature control knobs and the room thermostat/cylinder thermostat, if fitted, to the desired temperature.

TO STOP THE APPLIANCE

For Short Periods

Turn the central heating temperature control knob fully anti-clockwise to the '**O**' position.

For Long Periods


Turn the CH temperature control knob switch to the '**O**' position. Switch off the mains electricity.

A fascia mounted mechanical programmer will require resetting if mains supply has been disconnected.

ELECTRICITY SUPPLY FAILURE

If the electricity supply fails the appliance will not operate. Once the supply is restored the appliance will return to normal operation. If a programmer is fitted, check that the settings have been maintained.

Fig. 4. 15/24SBi with front panel removed.

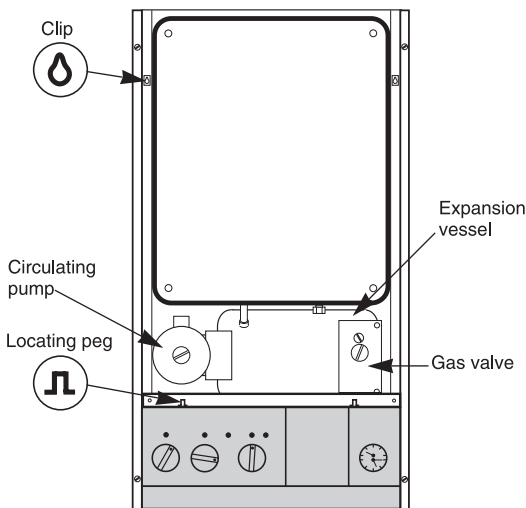

APPLIANCE LOCKOUT

The appliance can be reset by pressing the reset button. Check that the gas supply has not been interrupted.

If this condition continues to occur, then call a service engineer.

REMOVAL AND REPLACEMENT OF THE FRONT PANEL (See Fig. 4)

Removal:

Holding the panel at the edges, slide it upwards to disengage the clips and ease the top edge forwards and upwards to raise it clear of the two pegs on the top edge of the fascia.

Replacement:

Locate the two holes in the bottom edge of the front panel over the two pegs on the top edge of the fascia and reverse the removal procedure.



APPLIANCE FAILS TO OPERATE

More than 30% of all calls made to Worcester Heat Systems to report appliance faults or breakdowns prove to be false alarms, as there is often a simple explanation for the apparent malfunction.

So, to help you save time and money – not to mention frustration and inconvenience – please refer to the General Information, Notes and Lighting Instructions ensuring all controls are set correctly.

If, after following the instructions the appliance still fails to operate correctly call the Worcester Heat Systems Service Centre. Arrangements will be made for an engineer to call as soon as possible.

CALL-OUT CHARGES

All of our field service engineers are factory trained.

If you request a visit from an engineer and your appliance has been installed within the last 12 months, no charge will be made for parts and/or labour, providing:

- The appliance was commissioned correctly on installation.
- An appliance fault is found and the appliance has been installed within the past 12 months.

A call-out charge will be made where:

- The appliance has been installed for over 12 months, or
- Our Field Service Engineer finds no fault with the appliance (see note), or
- The cause of breakdown is with other parts of your plumbing/heating system, or with equipment not supplied by Worcester.

NOTE: Invoices for attendance and/or repair work carried out on your appliance by any third party will not be accepted.

MAINTAINING YOUR APPLIANCE

Your new Worcester system boiler represents a long-term investment in a reliable, high quality product.

In order to realise its maximum working life, and to ensure it continues to operate at peak efficiency and performance, it is essential that your boiler receives regular, competent servicing and annual maintenance checks beyond the initial 12 month guarantee period.



Regular service contracts can be arranged with your installer – however if you have difficulty making a satisfactory arrangement simply contact Worcester Heat Systems on **0345 256206** for help.

If you would like to know more about Worcester's extended warranty options please tick the appropriate box on your warranty registration card.



CONTACT NUMBERS:

UK Call Centre	Tel.	08457 256 206
UK Call Centre	Fax.	01905 757536
Scotland only	Fax.	01506 441 687

OPERATING HOURS:

Mon - Fri	8.00am to 6.00pm
Sat	8.30am to 1.00pm

Please contact our UK Call Centre number where our friendly operators will book your call with one of our team of nationwide engineers.

NOTE:

Sunday and Bank Holiday cover is not available

IMPORTANT

Do not touch or adjust any sealed component



YOUR WORCESTER SYSTEM BOILER GUARANTEE

This appliance is guaranteed against faulty materials or workmanship for a period of twelve calendar months from the date of installation subject to the following conditions and exceptions.

1. That during the currency of this guarantee any components of the unit which are proved to be faulty or defective in manufacture will be exchanged or repaired free of material charges and free of labour charges by Worcester Heat Systems Limited.
2. That the householder may be asked to prove the date of installation, that the appliance was correctly commissioned and, where appropriate, the first 12 month service has been carried out to the satisfaction of Worcester Heat Systems Limited when requested.
3. That any product or part thereof returned for servicing under the guarantee must be accompanied by a claim stating the Model, Serial Number, Date of Installation.
4. That Worcester Heat Systems Limited will not accept responsibility for damage caused by faulty installation, neglect, misuse or accidental damage, the non-observance of the instructions contained in the installation and Operating Instructions Leaflets.
5. That the appliance has been used only for normal domestic purposes for which it was designed.
6. That this guarantee applies only to equipment purchased and used in mainland Great Britain.

This guarantee is given in addition to all your normal statutory rights.



GUARANTEE REGISTRATION

You should complete and return the postpaid Guarantee Registration Card within 14 days of purchase.

The card will register you as the owner of your new Worcester system boiler and, while this will not affect your statutory rights in any way, it will assist us to maintain an effective and efficient customer service by establishing a reference and permanent record for your boiler.

IMPORTANT: SERIAL NUMBER. Copy the number off the Guarantee Card.

FOR YOUR OWN RECORD

MODEL

SERIAL NUMBER

(See identity label inside appliance casing)

TYPE/SIZE

DATE OF INSTALLATION

CORGI CONTACT

All **CORGI Registered** installers carry a **CORGI ID** card and have a registration number. Both should be recorded in your central heating log book. You can check your installer is **CORGI Registered** by calling **CORGI** on **01256 372300**



WORCESTER

Bosch Group

EXCELLENCE COMES AS STANDARD

Worcester Heat Systems Limited. Cotswold Way, Warndon, Worcester WR4 9SW.

Telephone: (01905) 754624. Fax: (01905) 754619.

Technical Service Helpline 08705 266241.

www.worcester-bosch.co.uk

8 716 145 192d 11/0